

Can you check your
fuel inventory levels
at all your bulk stations
remotely 24/7/365?

SiteSentinel®
iSite™
Automatic Tank Gauge




- 24/7/365 information and control
- No fees to access your own data
- Intuitive interface is user-friendly
- Better inventory delivery scheduling
- Real-time inventory management and reconciliation



Leading the Way in Bulk Station Tank Gauge Technology

OPW FMS introduces a Best-in-Class Liquid Bulk Station System for monitoring your valuable fuel inventory. The SiteSentinel® iSite™ offers the advantages of easy installation and accurate monitoring for tank farms and bulk storage facilities. With wireless access, you can monitor and manage your inventory like never before with this cost-effective solution. OPW Fuel Management Systems is leading the way in Liquid Bulk Station tank gauge innovation.

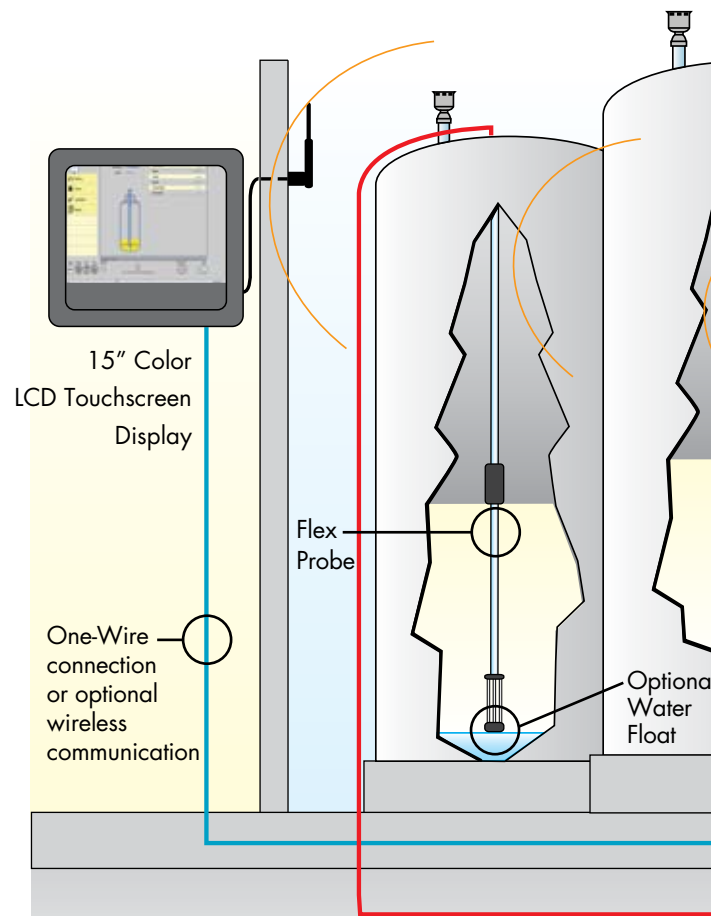


BEST-IN-CLASS – SITESENTINEL® iSITE™ CONSOLE

- **Information at Point-of-Use:** One-Touch access display console can be installed where you want it (back office, front of building, wall mount, desktop, at home, thousands of miles away – your choice)
- **Critical Information at Point-of-Use:** Cockpit style presentation of information provides all critical information on the screen in real-time: inventory, deliveries, compliance, and general site status
- **Get Connected:** Specially designed for connectivity now and into the future. Ports include: 2 x ethernet, 2 x 485, 4 x 232, 2 x USB, 2 internal USB, modem and wireless
- **Ease of Use:** The easiest, most intuitive tank gauge system in the industry requiring the least amount of training and the least amount of menu navigation on a 15" color touchscreen or your PC
- **Lowest Cost of Installation:** Requires the least amount of wiring, conduits and installation time when the VSmart module is mounted near the tank
- **Save your Site Settings:** Site settings can be saved offsite and downloaded in event of equipment damage



BEST-IN-CLASS – REMOTE ACCESS AND MONITORING

- **Online Access Anywhere @ Anytime:** SiteSentinel® iSite™ enables you to monitor your site via the internet when it is necessary or convenient 24/7/365

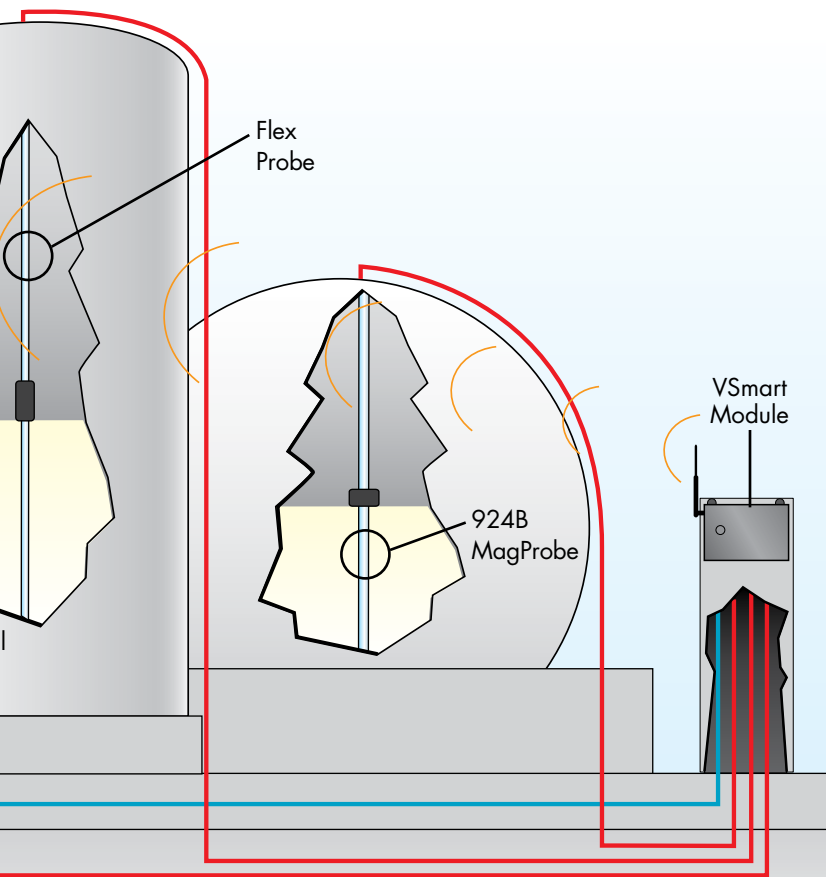

BEST-IN-CLASS – VSMART MODULE

- **Automatic Configuration:** Automatically detects the type of device connected and sends the device information directly from the VSmart module to the SiteSentinel® iSite™ console! This feature provides for easy configuration of the site utilizing the Automatic Configuration Detection (ACD) feature built directly into the SiteSentinel® iSite™ Console
- **One Wire Connection:** For hardwired applications, connect to the console with RS485 or CAT5 cable
- **Wireless VSmart Capability:** It's easy to communicate wirelessly between the tank farm and the SiteSentinel® iSite™ console located inside the building
- **The Simplicity of a Wireless Device:** SiteSentinel® iSite™ uses Point-to-Point 900 MHz wireless radio technology which can eliminate the need to run conduit under existing concrete or paved fueling facilities



BEST-IN-CLASS AST FLEXIBLE PROBE

The AST Probe is made of flexible Polyvinylidene Fluoride (PVDF). Its inherent chemical resistance makes it ideal for petrochemical, bulk lube storage, aviation and railroad fueling applications. It can be installed in aboveground storage tanks up to 50 feet high (15.24 m). Its design eliminates the bulky electronics at the top of the sensor for easy insertion and mounting. Product floats are available in 2" (5.1 cm) and 4" (10.2 cm) for use in tank openings from 2 to 4 inches (5.1 cm to 10.2 cm).

- **Proven Highly Accurate Magnetostrictive Technology**
- **Optional Water Float Available**
4" floats for vertical tanks with 4" minimum openings

BEST-IN-CLASS – 924B MAGPROBE

- **Highly Accurate and Reliable Magnetostrictive Technology:**
Provides inventory management and in-tank water detection
- **Easiest Installation:** Can "daisy-chain" up to 4 "924B" probes on one barrier position which makes installation easier and less time consuming
- **Sealed Construction:** Head is welded to the shaft to ensure long-life integrity. Designed to prevent fluid from entering the probe head in the event of a tank overflow

Console

- Large color touchscreen display gives one-touch access to real-time inventory data, delivery status, alarm conditions and leak detection information all accessible from a single cockpit view
- Monitors up to 256 "924B" probes and/or 1,024 Smart sensors that can be connected in any combination
- Monitors up to 64 flex probes
- One system handles a mix of horizontal and vertical tanks utilizing rigid and flexible magnetostrictive probe technologies.
- Provides real-time, accurate inventory information to include gross or net-corrected tank volume, product level, water level and temperature for individual tanks
- Available output modules provide multi-purpose relays, which can be used for outputs such as overflow alarms, sensor alarms or for turning on and off external devices
- USB and network printer interface
- SQL database, FTP available for report data
- System provides programmable correction factors for restrapping tanks (450 points)
- Software is downloadable for easy updates
- Automatically send text messages to cell phone, fax and/or e-mail alarms and events
- Operating Temperature: 32° F to 122° F (0° C to 50° C)

- Power Requirements: 120/240 VAC \pm 10%, 50/60 Hz.
- Communication Ports: 2 x Ethernet, 2 x 485, 4 x 232, 2 x USB, 2 internal USB, modem and wireless
- Internal on main board: 2 outputs and 1 input contacts, external: using OM-4/P relay module, up to 32 relays max., 4 output relays per module, 2 inputs, 8 modules per system

VSmart & Probe Specifications

- NEMA 4 rated VSmart enclosure
- NEMA 4 rated wireless modem
- Number of Probes: Up to 32 "924B" probes and/or 8 flex probes per Vsmart module, up to 8 VSmart Modules per SiteSentinel® iSite™ Console
- Probe Length: horizontal or vertical tanks Up to 12' (3.7 m) 924B rigid stainless steel, up to 50' (15.24 m) flexible PVDF for AST applications
- Probe inputs intrinsically safe magnetostrictive 1 or 2 floats
- Location: Class 1, Division 1, Group D EEx ia IIA T 4
- Temperature Range: -40° F to 158° F (-40° C to 70° C)
- Data Cable: 250' (75 m) or less use Belden 88760, from 251'-1,000' (77 m to 304 m) use Belden 9182
- Floats: Nitrophyl 2" (5.1 cm), 4" (10.2 cm) and stainless steel 2" (5.1 cm)

Certification 



Dover Companies working to provide comprehensive liquid terminal management solutions.

Dover Corporation is a world-wide, diversified manufacturer of industrial products. Dover Companies, such as Blackmer, OPW Engineered Systems and OPW Fuel Management Systems manufacture and service all the quality liquid bulk terminal components a company needs to succeed in the global marketplace. Take some time to learn more about these companies below.



www.blackmer.com

Blackmer was incorporated in 1903 and is a leading manufacturer of sliding vane pumps, centrifugal pumps and compressors for the transfer of liquid and gas products. Blackmer products are used in a variety of industries, including LPG, Chemical Processing, Refined Fuels, Petroleum, Food & Sanitary and the Mobile Transport industries.



www.opw-es.com

OPW Engineered Systems specializes in the engineering, designing and manufacturing of systems for the safe and efficient loading and unloading of critical hazardous materials: loading arms, swivel joints, sight slow indicators, isolation rings, quick and dry disconnect systems and safety breakaways.



www.opwglobal.com

From the most innovative tank gauging systems in the world to the most reliable and accurate automated fuel control systems, OPW Fuel Management Systems offers the most comprehensive solution on the market for knowing exactly how much fuel you have and where it is going. From complete fuel accountability to total reconciliation and protection against fuel theft, OPW FMS keeps you and your assets covered...both coming and going.

ONE COMPANY. ONE WORLD. ONE SOURCE.™

6900 SANTA FE DRIVE • HODGKINS, IL USA 60525 • www.opwfms.com • 708-485-4200 • (fax) 708-485-4630

NOTE: All information subject to engineering and/or other changes. All trade names are copyrighted. Patents Pending. ©2009 OPW Fuel Management Systems.

LBTBRO • 10/09 ?M